

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061804 A1

(51) International Patent Classification⁷: **E02D 27/01,**
27/02

(74) Agent: **FREEHILLS PATENT & TRADE MARK AT-**
TORNEYS; Level 43, 101 Collins Street, Melbourne, Vic-
toria 3000 (AU).

(21) International Application Number:
PCT/AU2004/001806

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date:
22 December 2004 (22.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003907151 23 December 2003 (23.12.2003) AU

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **THE
AUSTRALIAN STEEL COMPANY (OPERATIONS)
PTY LTD** [AU/AU]; 650 Lorimer Street, Port Melbourne,
Victoria 3207 (AU).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **O'GRADY, James,
Francis** [AU/AU]; 518 Ballarat Road, Sunshine, Victoria
3020 (AU).

Published:

— with international search report

[Continued on next page]

(54) Title: CAVITY FORMER

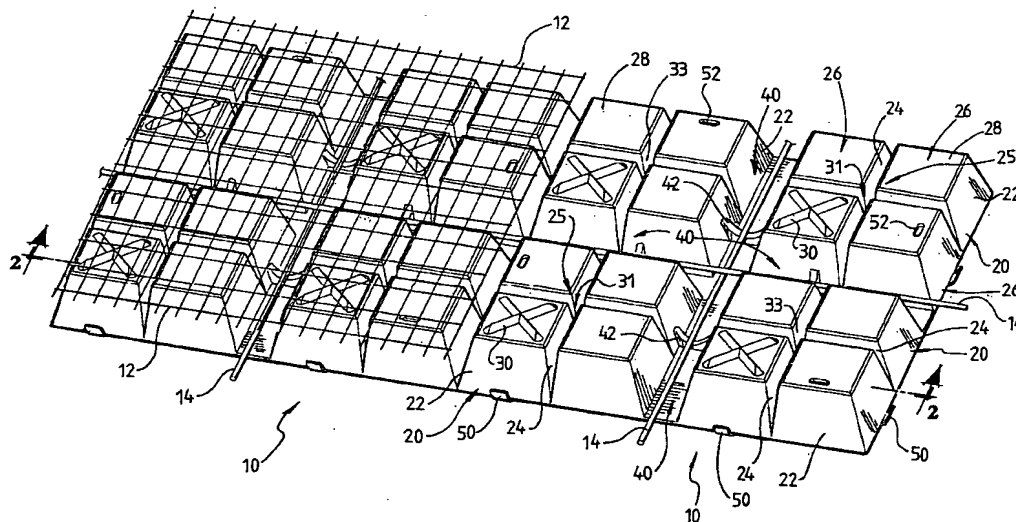

(57) Abstract: A cavity former for forming one or more cavities in a concrete slab, includes a hollow body (20) about which, during use of the former, poured concrete flows and subsequently cures to form a concrete slab in which the hollow body defines a cavity. The hollow body (20) has a first wall (27), a depending skirt wall (22) about the periphery of the first wall, and structure (24) defining, within the periphery, at least one depending hollow pillar formation (25) for in situ bracing the first wall to an underlying surface on which the skirt wall also rests.

BEST AVAILABLE COPY

WO 2005/061804 A1

WO 2005/061804 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BEST AVAILABLE COPY